


CPX Series — Turning every performance into a classic.

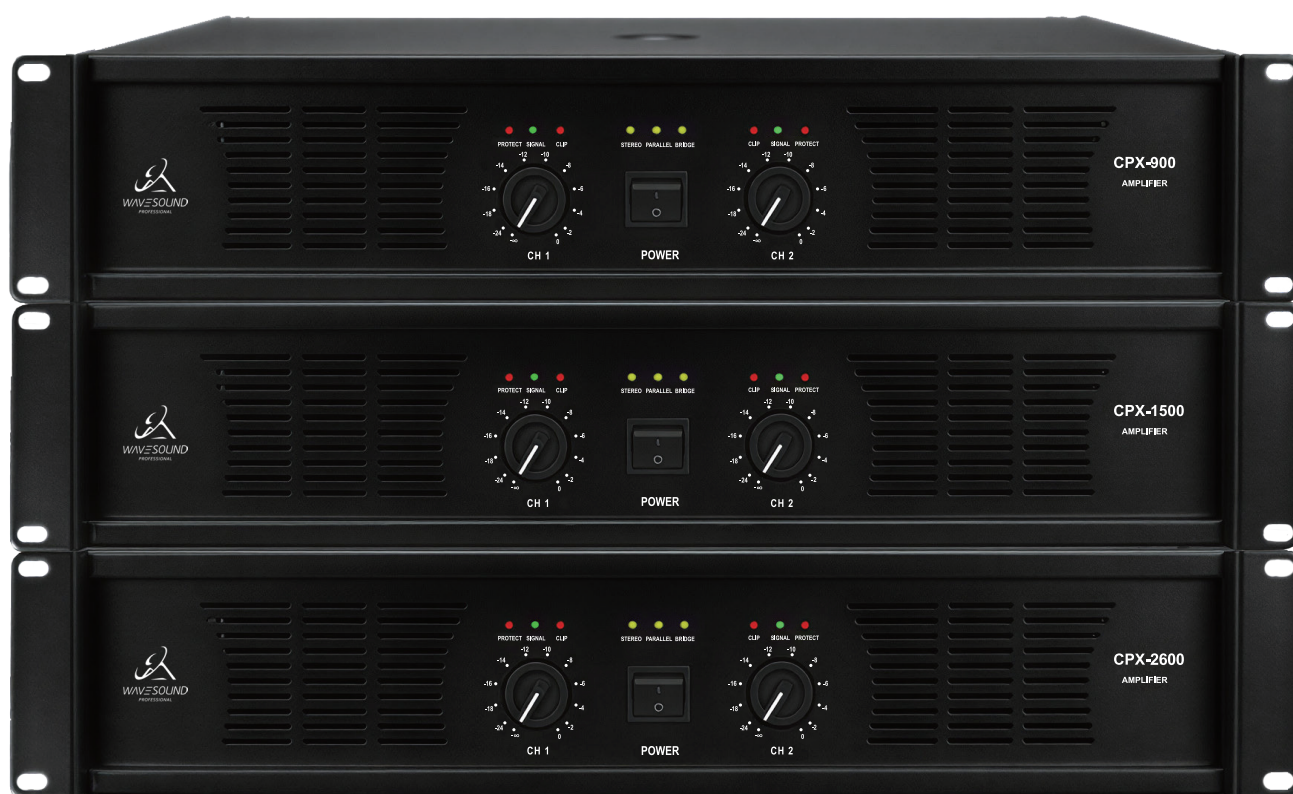

The Wavesound series blends high-fidelity audio with rugged professional engineering. Designed for ease of use, all models feature XLR thru connectors for effortless daisy-chaining and clean cable management. At its core, a **massive toroidal transformer** ensures rock-solid stability against power fluctuations.

Built for the most demanding environments, the heavy-duty steel chassis utilizes our proprietary Ultra **Tunnel Ventilation System** for superior cooling. With full circuitry protection and versatile mode switching (Stereo, Parallel, and Bridge), Wavesound delivers high-performance sound with industrial-grade durability.

Three Output Modes — Seamlessly switch between Parallel, Stereo, and Bridge modes.

Adjustable Input Sensitivity — Flexible gain control to precisely match various signals and sources.

Safety Certified — Fully compliant with ROHS R51396 standards for eco-friendly and safe operation.

Premium Toroidal Transformer — Delivers high-current dynamics, ensuring a deep and punchy low-end response.



SPECIFICATIONS

MODEL	CPX-900	CPX-1500	CPX-2600
Stereo Power Output : RMS			
8Ω	2x200W	2x400W	2x600W
4Ω	2x500W	2x600W	2x1000W
Bridged Mono Power Output (RMS)			
8Ω	700W	1000W	1800W
4Ω	900W	1500W	2600W
Frequency Response	20 Hz - 20 kHz		
THD+N @1kHz Full Pwr	< 0.03%		
Input Sensitivity	0.77V / 1.0V / 1.44V (SELECTABLE)		
S/N	>103dB		
Slew Rate	60V/us		
Damping Factor 1kHz@8Ω	>1000 : 1		
Input Impedance	10KΩ Balanced To Ground		
Ouyput Circuit Type	Class AB		
LED Indicators (Per Channel)	Bridge, Parallel, Power, Signal, Clip, Protect		
Protection	Over temperature limit, Overload protection, DC protection		
Input Connectors	6.3 JACK / Female XLR-3 (Balanced Input / Unbalanced Input)		
Output Connectors	6.3 JACK / Male XLR-3 / SPEAKON / Banana Plug		
Dimensions (H × W × D)	483 × 366 × 88 (mm)	5483 × 366 × 88 (mm)	5483 × 366 × 88 (mm)
Net Weight	8.3 Kg	9.2 Kg	11.5 Kg

